

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 955 634 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
10.11.1999 Bulletin 1999/45

(51) Int. Cl.⁶: G11B 20/00, H04H 1/00

(21) Application number: 98201432.6

(22) Date of filing: 04.05.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Wijnen, Arie Marinus
163 42 Ilioupolis, Athens (GR)
• Pandelidis, Spiro John
Ano Ilioupolis, 163 34 Athens (GR)

(71) Applicant:
Spiro J. Pandelidis High Tech Applications
16345 Athens (GR)

(74) Representative:
Beitsma, Gerhard Romano et al
van Exter, Polak & Charlouis B.V.
P.O. Box 3241
2280 GE Rijswijk (NL)

(54) Anti-copying system for audio signals

(57) In order to protect audio signals against copying, the present invention proposes to mix the audio signal with at least one non-audible disturbance signal. A first disturbance signal may be a low-frequency signal which is added to the audio signal, while a second disturbance signal may be a high-frequency disturbance

signal which is multiplied with the audio signal. Additionally, the second disturbance signal may be modulated by a modulating signal comprising either the original or inverted original signal, or spoken messages indicative of an illegal copy.

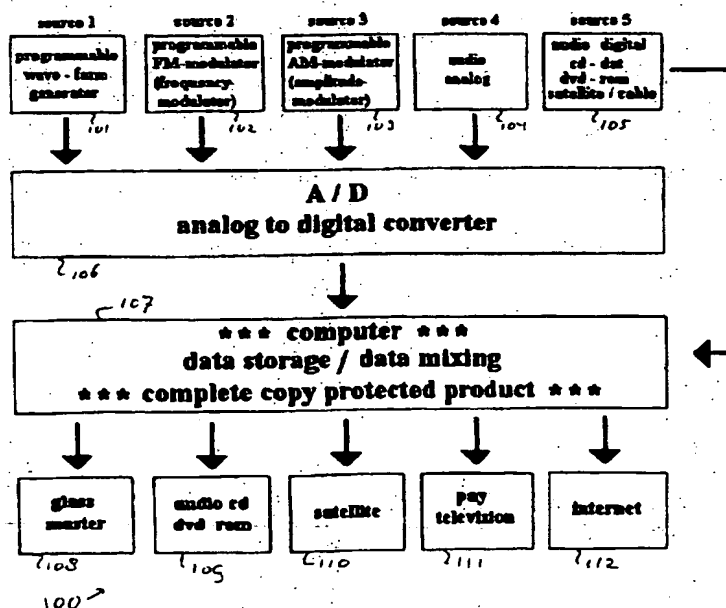


Fig. 10

BEST AVAILABLE COPY

Description

[0001] The present invention relates to an anti-copying system for audio signals, in particular digital audio signals.

[0002] Present day digital techniques allow perfect copies of audio signals to be made. For example, the digital audio information of a compact disc (CD) can be digitally registered on tape or can even be used to physically reproduce the CD by means of a so-called CD burner (recorder for compact discs). The possibility of digital copying, producing perfect copies of the original, has resulted in many illegal copies of CDs or other information carriers being made. This in turn leads to a substantial loss in copyright royalties. For this reason, there is a need for protection against copying of audio signals.

[0003] Accordingly, the present invention provides a method of protecting an audio signal against copying, characterized by mixing the audio signal with at least one non-audible disturbance signal.

[0004] By mixing the audio signal with a non-audible disturbance signal, that is an additional signal having a frequency lying outside the normal audible range, it is possible to obtain a combined audio signal which is, when replayed as it is, effectively undisturbed but which shows audible disturbances when copied.

[0005] Advantageously, a first disturbance signal is a low-frequency signal which is added to the audio signal. When the original audio signal and the low-frequency first disturbance signal have comparable amplitudes, the resulting mixed output signal will be highly resistant against copying to an analogue tape recorder. This aspect of the present invention is based on the insight that slowly varying signals cause the magnetic heads of a tape recorder to effectively erase the recorded signal, or at least to suppress the recording of the signal.

[0006] Preferably, the low-frequency disturbance signal has a frequency of approximately 2 Hz, advantageously between 1.5 and 3 Hz, and has a substantially sinusoidal shape. These low frequencies are not audible, nor can they be reproduced by regular audio sets, yet they have the above-mentioned erasing effect.

[0007] Advantageously, a second disturbance signal is a high-frequency signal which is multiplied with the audio signal. This may effectively result in the original audio signal being substantially interrupted ("chopped") at a high interruption frequency. Although this regular interruption is normally not audible due to the high (non-audible) frequency involved, copying of the signal will result in an incomplete demodulation of the combined signal due to the characteristics of the copying devices.

[0008] Preferably, the high-frequency disturbance signal has a frequency of approximately 20 kHz, and has a substantially rectangular shape (block pulses) so as to effectively interrupt the original audio signal.

[0009] Preferably, both the first, low-frequency disturbance signal and the second, high-frequency disturbance signal are mixed with the original audio signal to

produce a combined, copy-protected audio signal.

[0010] Advantageously, the audio signal is a digital signal representation involving a sampling frequency, and the second disturbance signal has a frequency which varies in time, preferably from approximately half to approximately three-quarters of the sampling frequency. This results in a second disturbance signal having both a varying (preferably increasing) frequency and, due to the aliasing effects involved, a varying (preferably decreasing) amplitude. This results in a clearly audible amplitude modulation in the copied signal.

[0011] The second disturbance signal may also be frequency and/or amplitude modulated by auxiliary modulating signals, e.g. derived from the original audio signal.

[0012] The invention further provides a device for protecting audio signals against copying, comprising signal generation means for generating at least one disturbance signal, mixing means for mixing at least one disturbance signal with the audio signal, and output means for outputting the resulting mixed audio signal.

[0013] The present invention will be further explained with reference to the accompanying drawings, in which:

Fig. 1 schematically shows possible applications of the method of the present invention.

Fig. 2 schematically shows a first disturbance signal as used in the method of the present invention.

Fig. 3 schematically shows a combination of the first disturbance signal of Fig. 2 and an audio signal.

Fig. 4 schematically shows the signal of Fig. 3 as recorded on a tape recorder.

Fig. 5 schematically shows the first disturbance signal as in Fig. 2.

Fig. 6 schematically shows the first disturbance signal of Fig. 5, combined with a second disturbance signal.

Fig. 7 schematically shows the signal resulting from the signals of Figs. 5 and 6.

Fig. 8 schematically shows a disturbance signal which is frequency and/or amplitude modulated.

Fig. 9 schematically shows the effect of applying the disturbance signal of Fig. 8 to an audio signal.

[0014] As shown in Fig. 1, the copying of (digital) audio signals may be considered to involve two categories or groups of copying operations:

- Group 1: from digital to analog signals, and
- Group 2: from digital to digital signals.

Although some of the techniques described in this document may also apply to copying from analog to analog signals (signal representations), the following discussion will focus on the copying of digital audio signals, that is audio signals registered in a digital representation (sampled audio signals represented digitally by

ones and zeros).

[0015] Especially group 2 poses problems with respect to copyright, as the CD-burners and DAT-recorders normally allow perfect copies of the original signals to be made (it will be understood that so-called DAT-recorders are tape/cassette recorders which digitally register audio signals on tape).

[0016] According to a first aspect of the present invention, a low-frequency disturbance signal (also called first disturbance signal) is added to an (original) audio signal. Such a first disturbance signal is shown in Fig. 2. The signal has a frequency of approximately 2 Hz, although a range of frequencies from about 1 Hz to about 10 Hz may be used. It is only desired that the first disturbance signal is normally not audible. The amplitude of the second disturbance signal is of the same order of magnitude as the amplitude of the audio signal it is to be added to, and is preferably two or three times as large as the latter. The first disturbance signal is, like the second disturbance signal to be discussed later, preferably digitally generated.

[0017] The result of the adding of the signals is shown in Fig. 3. The mixed or combined signal of Fig. 3 is obtained by producing the sum of an original audio signal and the first disturbance signal of Fig. 2. When this signal is reproduced from e.g. a CD (Compact Disc), the low-frequency modulation is not audible. However, when the combined signal of Fig. 3 is copied onto tape (regular tape or cassette), the slow "shift" results in the recorded signal (shown in Fig. 4) being regularly interrupted. This is caused by the change in signal amplitude between the peaks and troughs of the first disturbance signal, which induces an erasing effect in the recorder heads. It will be clear that the resulting signal of Fig. 4 has a very poor sound quality. The loss-less copying of the signal of Fig. 3 onto tape is thus effectively prevented by inducing a serious signal distortion.

[0018] According to a second aspect of the present invention, a second, high-frequency disturbance signal is applied to the audio signal. Preferably, as shown in Figs. 5-7, this modulation is applied to the original audio signal through the first disturbance signal, but the second disturbance signal may also be applied independently from, or even without, the first disturbance signal.

[0019] Fig. 5 again shows the first disturbance signal of Fig. 2. This signal is mixed with a high-frequency second disturbance signal which preferably is a block wave having two amplitude levels, e.g. maximum amplitude and zero. This second disturbance signal preferably has a frequency of approximately 20 kHz, but may also have a varying frequency, as will be explained later. The frequency is chosen such that the second disturbance signal, like the first disturbance signal, is normally non-audible.

[0020] The signal of Fig. 6 is the resulting signal after multiplying the first disturbance signal of Fig. 5 with the second disturbance signal (product of the signal amplitudes). The signal of Fig. 7 is the resulting signal after

adding the first disturbance signal of Fig. 5 to the second disturbance signal (sum of the signal amplitudes).

[0021] The heads of a tape (or cassette) recorder normally do not reproduce signals having a frequency of about 20 kHz. Feeding the signal of Fig. 6 or Fig. 7 to the recording head of a tape recorder will result in a partial demodulation of the high-frequency disturbance signal. This partial demodulation will lead to a distortion of the signal, thus effectively protecting the signal against copying.

[0022] Advantageously, the high-frequency second disturbance signal is frequency modulated by at least one modulating signal. Alternatively, or additionally, the second disturbance signal is amplitude modulated by the at least one modulating signal. These modulations will result in a further distortion of the (partially) demodulated signal.

[0023] The modulating signal may contain spoken messages indicative of illegal copying, such as "this is an illegal copy" or "this recording is copy protected". The modulating signal may also be derived from the original audio signal and may comprise the original signal itself or its inverse (inverted original signal). Preferably, the modulating signal contains both spoken messages, the original signal and the inverted original signal, each during a certain time period of for example 30 seconds.

[0024] In order to produce a copy-protected recording, the modulating signals may be additionally registered on the information carrier (such as a CD) or may be transmitted separately via a satellite network, internet, or the like.

[0025] The disturbance signals described above are in particular suited for the prevention of copying without quality loss to analog recorders (group 1 in Fig. 1). The (second) disturbance signal of Fig. 8 is in particular suited for the prevention of copying without quality loss to digital recorders, such as so-called CD burners.

[0026] The disturbance signal of Fig. 8 has a frequency which increases stepwise from 20 kHz to 30 kHz. As the sampling frequency used for CD recordings is about 44 kHz, the disturbance signal of Fig. 8 increases in frequency from just below half the sampling frequency (the Shannon frequency) to about three-quarters of the sampling frequency. As the frequency increases, the amplitude of the signal decreases. This type of signal proves to be highly effective in the prevention of loss-less copying. When mixed with an audio signal (by multiplying or adding), the signal of Fig. 9 results. As shown in Fig. 9, the resulting signal has a decreasing amplitude, effected by the modulating signal. In the signal of Fig. 9, the amplitude variations caused by the frequency sweep are clearly audible.

[0027] In addition to the frequency sweep, the same modulating signals may be used to modulate the second disturbance signals to Fig. 8 as used for the second disturbance signal of Figs. 6 and 7. Thus spoken messages, the original signal and/or the inverted original signal may be used to further modulate the signal of Fig.

8.

[0028] The system 100 shown by way of example in Fig. 10 is designed for copy protecting audio signals in accordance with the present invention. The system comprises signal sources 101-105, an analog to digital convertor 106, a signal processing unit (computer) 107 and signal destinations 108-112. The sources 101-104 of analog signals are connected to the signal processing unit 107 via the A/D converter 106, while the digital source 105 (e.g. a CD player) is directly connected with the signal processing unit 107.

[0029] The first source 101 is a programmable waveform generator for producing the first and/or second disturbance signal. The second and third sources 102 and 103 are programmable FM and AM modulators respectively. The fourth source 104 is an analog audio source, e.g. for producing spoken messages.

[0030] By means of the system 100, the method of the present invention may be readily applied.

[0031] Although the invention has been described with reference to audio signals only, it will be understood that its principles can be applied to other signals as well, e.g. video signals, by mixing normally non-perceivable disturbance signals with the original signal.

[0032] It will thus be understood by those skilled in the art that the present invention is not limited to the embodiments discussed above and that many additions and modifications are possible without departing from the scope of the present invention.

Claims

1. Method of protecting an audio signal against copying, characterized by mixing the audio signal with at least one non-audible disturbance signal.
2. Method according to claim 1, wherein a first disturbance signal is a low-frequency signal which is added to the audio signal, the low-frequency disturbance signal preferably having a frequency of approximately 2 Hz.
3. Method according to claim 1 or 2, wherein a second disturbance signal is a high-frequency signal which is multiplied with the audio signal, the high-frequency disturbance signal having a frequency of approximately 20 kHz.
4. Method according to claim 3, wherein the audio signal is a digital signal representation involving a sampling frequency, and wherein the second disturbance signal has a frequency which varies in time, preferably from approximately half to approximately three quarters of the sampling frequency.
5. Method according to claim 3 or 4, wherein the second disturbance signal is modulated by a modulating signal, said modulating signal comprising either

alone or in combination:

- spoken messages,
- the original audio signal,
- the inverted original audio signal.

6. Method according to claim 5, wherein the second disturbance signal is frequency modulated by the modulating signal.
7. Method according to claim 5, wherein the second disturbance signal is amplitude modulated by the modulating signal.
8. Information carrier storing an audio signal which is copy protected by the method according to any of the preceding claims.
9. Device for protecting audio signals against copying according to the method of any of claims 1-7, comprising signal generation means for generating at least one disturbance signal, mixing means for mixing at least one disturbance signal with the audio signal, and output means for outputting the resulting mixed audio signal.
10. Device according to claim 9, wherein the mixing means comprise adding means and/or multiplication means.

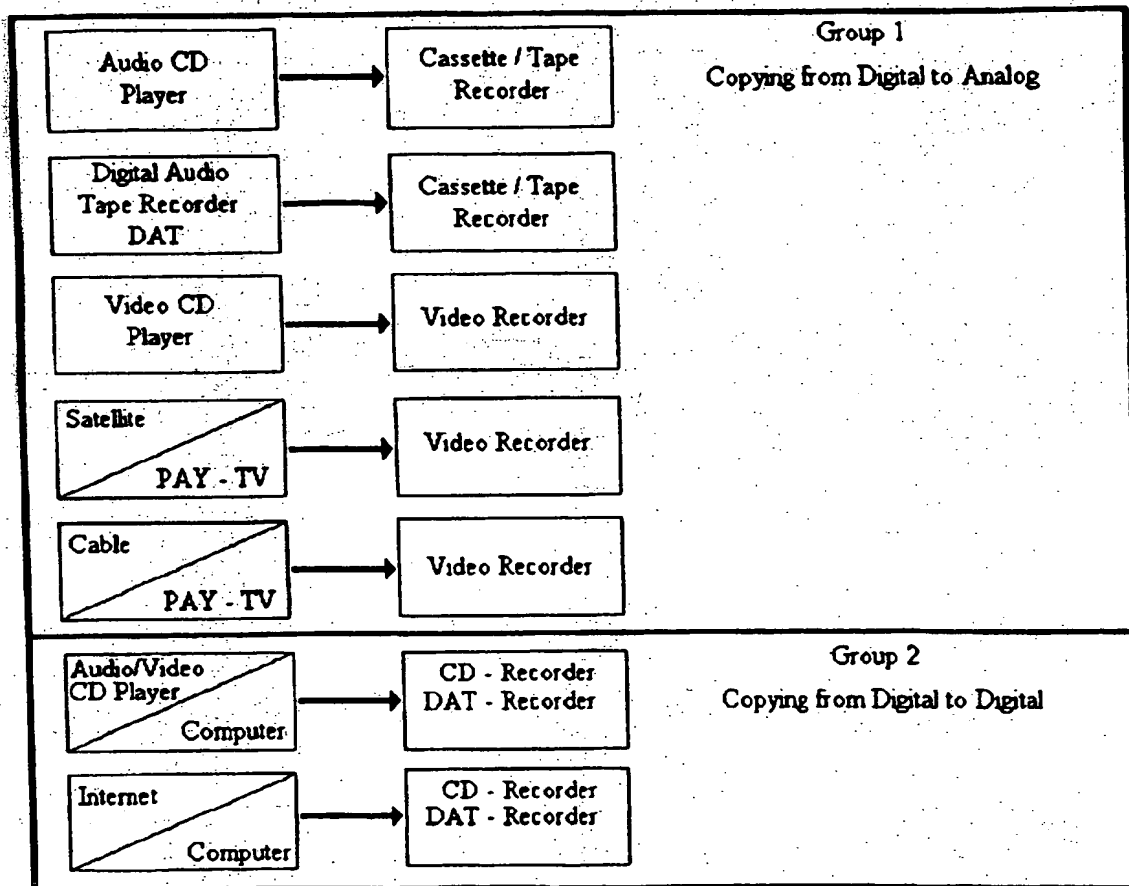
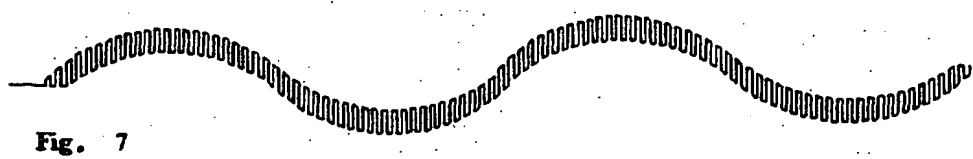
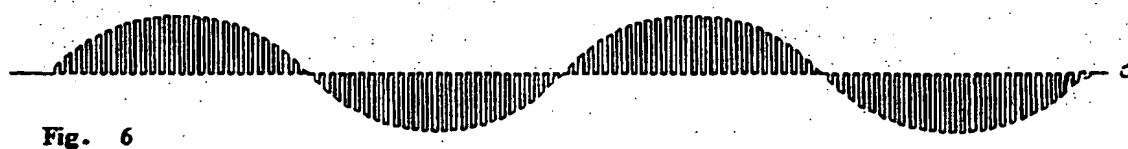
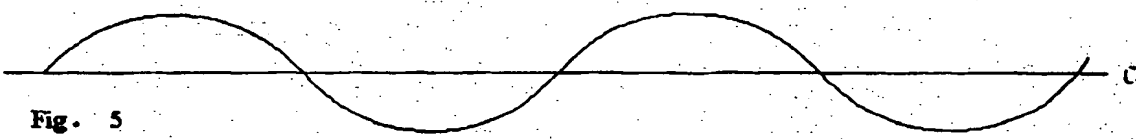

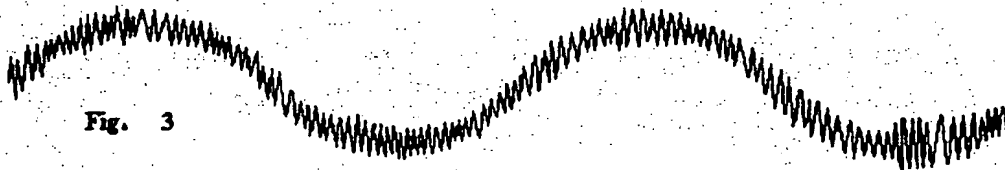
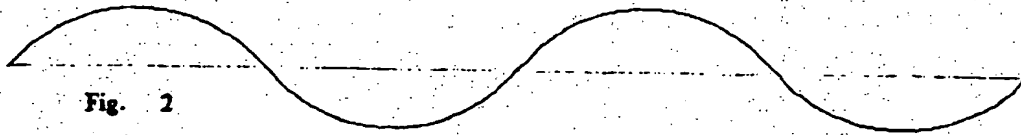


Fig. 1



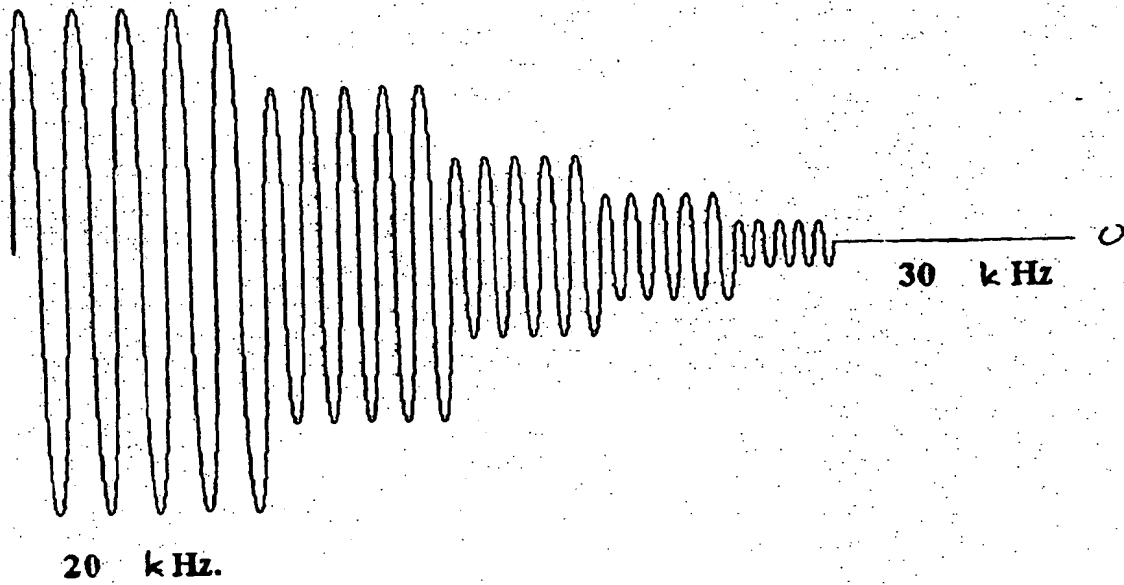
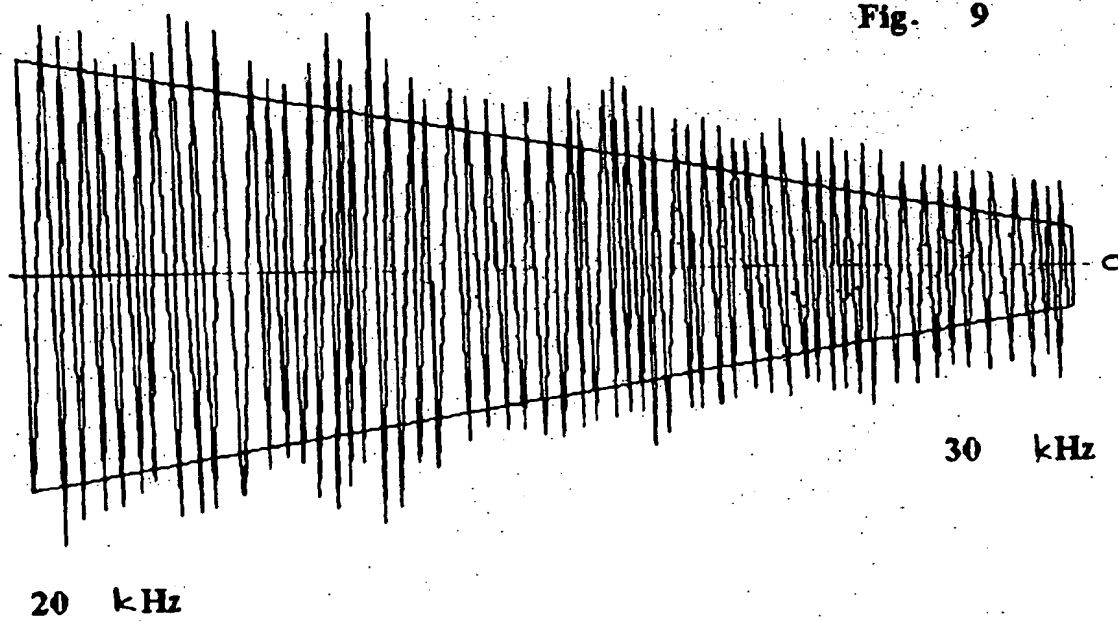


Fig. 8



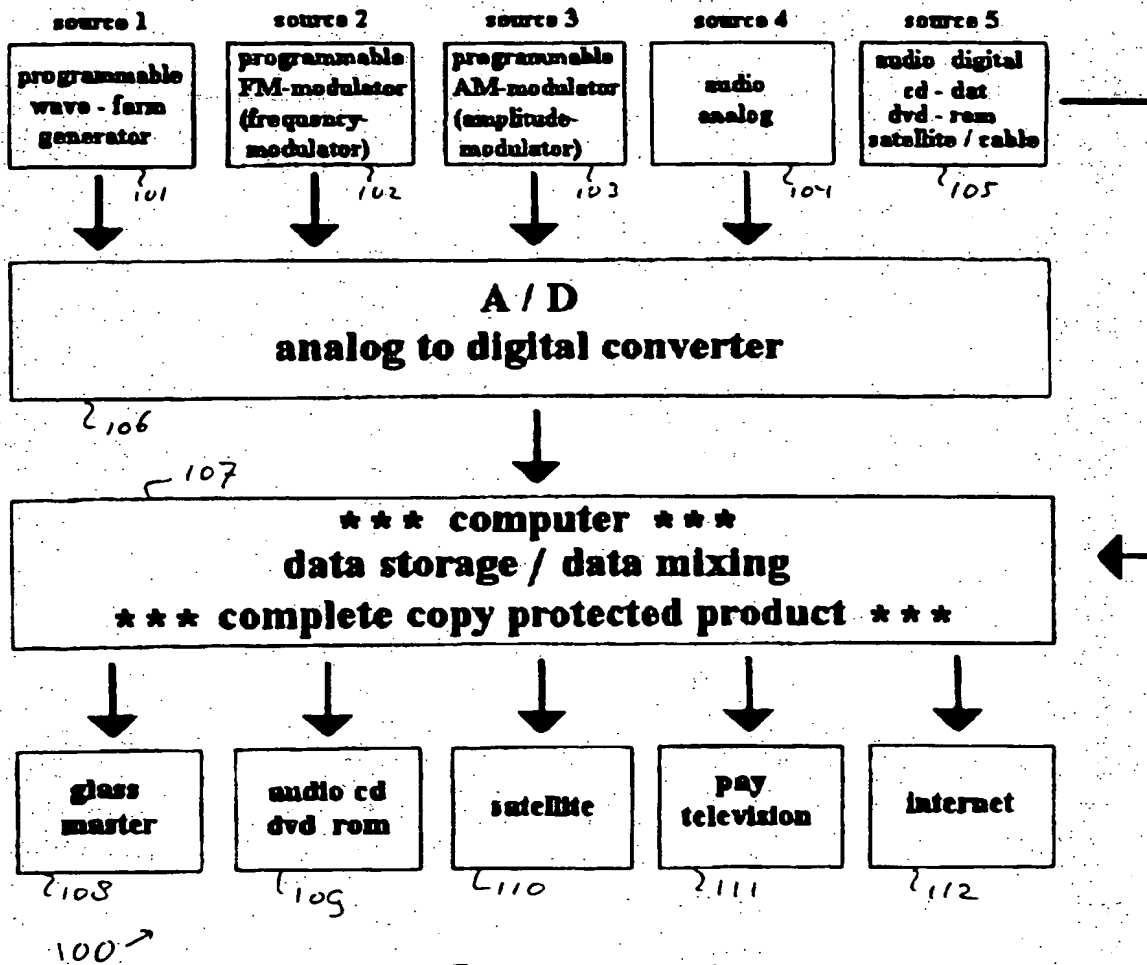


Fig. 10



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 20 1432

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.C1.6)
X	EP 0 298 691 A (MATSUSHITA ELECTRIC IND CO LTD) 11 January 1989 * abstract * * page 6, line 9 - line 21 * * claim 1 * * figure 18 *	1,2,8-10	G11B20/00 H04H1/00
X	EP 0 348 570 A (KEEN THOMAS CLAUDE HENRY ; KEEN AUDREY (GB); KEEN PAUL DAVID (GB)) 3 January 1990 * abstract * * column 1, line 38 - column 2, line 52 * * column 5, line 35 - line 49 * * figure 1 *	1,3,5,6,8-10	
X	US 4 644 422 A (BEDINI JOHN C) 17 February 1987 * abstract * * column 8, line 64 - line 68 * * claims 1,4,31 * * figures 1,4,7 *	1,3,5,8-10	
X	US 5 394 274 A (KAHN LEONARD R) 28 February 1995 * abstract * * claims 9,13,16,19 * * figures 1,4 *	1,3,5,8	TECHNICAL FIELDS SEARCHED (Int.C1.6) G11B H04H
X	US 4 802 212 A (FREEMAN SAMUEL R ET AL) 31 January 1989 * abstract * * claims 1,2,7 * * figure 1 *	1,8-10	
A		2	
-/-			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 September 1998	Examiner Simon, V
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (P0401)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 20 1432

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 372 601 A (PHILIPS NV) 13 June 1990 * abstract * * column 14, line 54 - column 15, line 4 * * claims 1,13,18 * * figure 1 *	1,2,8	
X	EP 0 392 612 A (PHILIPS NV) 17 October 1990 * abstract * * claims 1,13 *	1,8	
A	* figure 1 *	2,9	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search THE HAGUE		Date of completion of the search 30 September 1998	Examiner Simon, V
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02.92) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 20 1432

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-09-1998

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0298691	A	11-01-1989	JP 1014769 A	18-01-1989
			JP 1014770 A	18-01-1989
			JP 1078469 A	23-03-1989
			JP 1158668 A	21-06-1989
			JP 2523728 B	14-08-1996
			DE 3851724 D	10-11-1994
			DE 3851724 T	04-05-1995
			US 4979210 A	18-12-1990
			US 5073925 A	17-12-1991
EP 0348570	A	03-01-1990	GB 2199689 A	13-07-1988
US 4644422	A	17-02-1987	AU 1827083 A	23-02-1984
			EP 0114873 A	08-08-1984
			WO 8400635 A	16-02-1984
US 5394274	A	28-02-1995	NONE	
US 4802212	A	31-01-1989	NONE	
EP 0372601	A	13-06-1990	NL 8802769 A	01-06-1990
			NL 8901032 A	01-06-1990
			AT 118932 T	15-03-1995
			AU 626605 B	06-08-1992
			AU 4456889 A	31-05-1990
			DE 68921305 D	30-03-1995
			DE 68921305 T	07-09-1995
			ES 2071645 T	01-07-1995
			HK 61296 A	19-04-1996
			JP 2183468 A	18-07-1990
			US 5161210 A	03-11-1992
EP 0392612	A	17-10-1990	NL 8900934 A	01-11-1990
			CN 1046408 A	24-10-1990
			JP 2292776 A	04-12-1990
			US 5083224 A	21-01-1992

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.